

QUASW

Architrave Wireless Switch Instructions 80*60mm



KASW
Architrave Wireless Switch

Installation Instructions








Self Powered No Radiation No Maintenance No Wiring Durable Cost Saving

Read instructions carefully before installation



Architrave Wireless Switch



Specifications

Wireless Grid Switch Technical Parameters:

Work Type: Push Button
 Power Source: Micro Energy Acquisition and self generating (no battery required)
 Number of Keys: 1 (1 gang)
 Control Distance*: 30m (indoor)
 Communication Model: FSK
 Work Frequency: 433Hz
 Work Environment Temperature: -20°C ~ 55°C
 Control Method: Pairing with Kinetic Wireless Controller
 Compatible with 1 Gang Architrave flush or surface boxes with **16mm** minimum depth
 Life Time: 200,000 times on/off
 3 Year Warranty



* Distance comes from Kinetic laboratory test result. The actual distance in practical use might vary due to environmental difference.
 NOTE: The architrave metal box might reduce the control distance, as the metal will cause electromagnetic shielding that blocks the RF signal.

Architrave Wireless Switch Operation:

The Kinetic architrave wireless switch is compatible with 1 Gang Architrave flush or surface boxes with 16mm minimum depth. It can be used with both standard or dimming Kinetic receiving controllers (see controller instructions for more details about pairing).

Dimming Operation:


When paired with dimming Kinetic receiving controllers the architrave switch can also dim the lights: Pressing the switch quickly will turn the light ON/OFF. Keep the switch pressed to dim the light to the desired level. While the switch is pressed the lights will go down from 100%-0% and they will go up from 0-100% cyclically.

Kinetic Switch and Controller Wireless System:

The wireless Kinetic grid switch and wireless receiving controller can be paired in any combination: a controller can be controlled by a maximum of 10 separate switches, a switch can pair with an unlimited number of controllers.


Installation Instructions:

1. Ensure the architrave mounting box is securely fixed to the wall.
2. Use the screws provided to install the Kinetic architrave switch module back into the 1 gang architrave box.

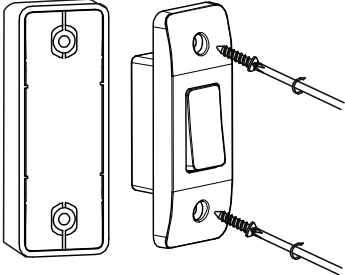

Note - The KASW Architrave Wireless Switch is compatible with 1 Gang Architrave flush or surface boxes with **16mm** minimum depth.

Product dimensions:

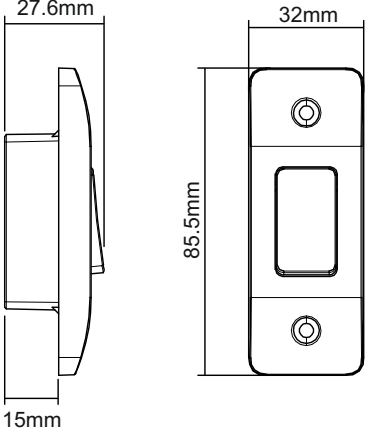

27.6mm 32mm

15mm 85.5mm

