
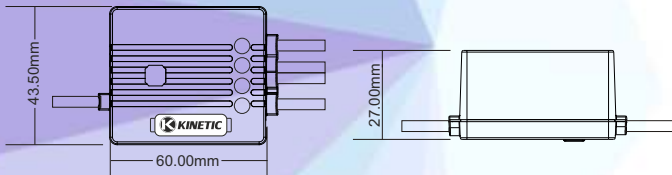


# KR302

## DC 10/24V Receiving Controller

The DC Kinetic wireless receiving controller with a high-efficiency switching power supply has a wide DC voltage range with excellent stability and durability. It works with the Quinetic wireless switch and has a load capacity of 5A. The DC Kinetic wireless receiving controller is equipped with an in-rush current suppression function thus creating a safe and durable product.

### KR302

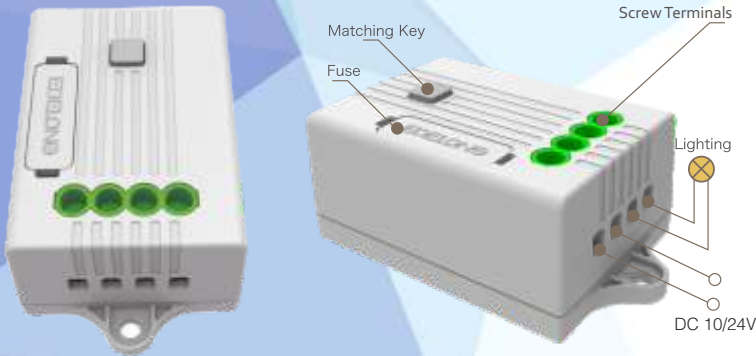

### KR302 - Kinetic DC 10/24V Controller Specifications:

Voltage Range	10-24V/DC
Sensitivity	-116dB
Control Load	5A Fused
Max load for LED Lighting	150W
Weight	25g
Life Time	200,000 times on/off
Work Environment Temperature	-30~55°C
Control Distance	160m (outdoor) ; 30m (indoor)
Control Method:	Pairing with Quinetic Wireless Switch
*Maximum loads may vary from manufacturer to manufacturer of the load.	


## Kinetic Controller Wireless Systems

The DC wireless Kinetic receiving controller can be paired with the Kinetic switch with any combination: a controller can be controlled by a maximum of 10 separate switches, a switch can pair an unlimited number of controllers.

### 1-Way Wireless System

Single-Multi-Control

Kinetic Wireless Switch

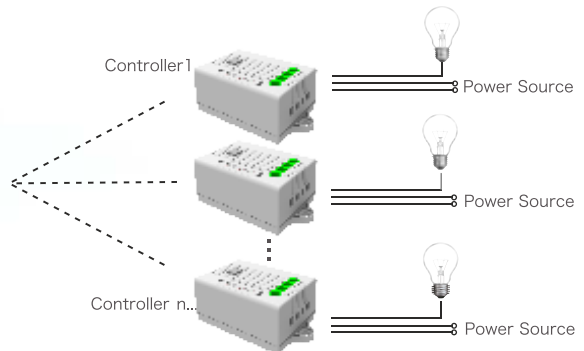



### 2-Way Wireless System

Dual Control

Kinetic Wireless Switch 1



Kinetic Wireless Switch 2

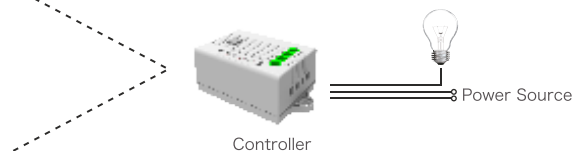

### 3-Way Wireless System

Multi-Single-Control

Kinetic Wireless Switch 1



Kinetic Wireless Switch 2



Kinetic Wireless Switch 10

