




USQFL - Kinetic Ultra Slim LED Floodlights



The new Kinetic Ultra Slim Floodlight comes with an integrated wireless Kinetic controller that can be paired with the Wireless Kinetic energy switch using any combination: a floodlight can be controlled by a maximum of 10 separate switches, a switch can pair with an unlimited number of floodlights.

Applications include: Gardens, Bushes/Shrubs, Security Lighting, Porch Lighting and Area Floodlighting, Factories, Offices

Dimensions(mm):

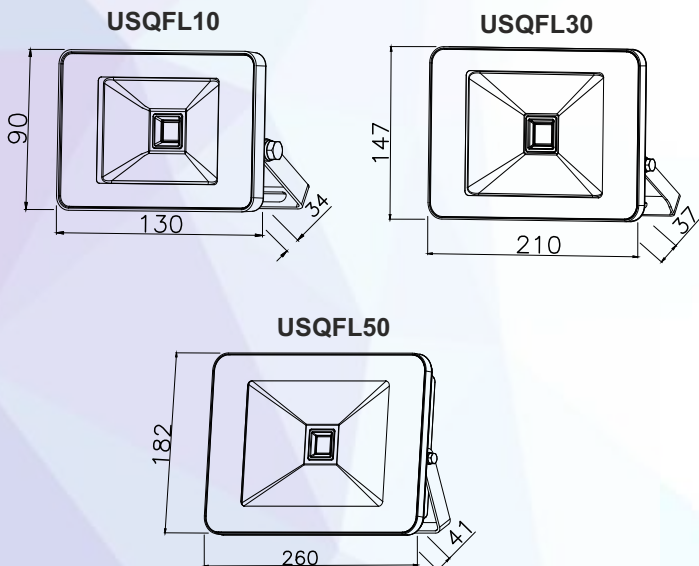

Features:

- Voltage Range: 220-240V
- Beam Angle: 120°
- IP Rating: IP66 Rating
- Warranty: 3 Years
- Not Dimmable
- Complete with built-in Kinetic Receiver
- Control method: pairing with Kinetic Wireless Switch (sold separately)
- Optional Garden Spike (not included)
- Shatter Resistant Tempered Glass
- Die Cast Aluminium Casing
- Adjustable Bracket
- Pre wired with 60cm length of rubberised cable

Specifications:



| Model | Power | Voltage | CCT | Lumens | Beam Angle | Dimensions | Weight |
|---------|-------|-------------|------------|--------|------------|--------------|-----------|
| USQFL10 | 10W | 220-240V/AC | 3000-6500k | 700lm | 120° | 130*90*34mm | 0.36 kgs |
| USQFL30 | 30W | 220-240V/AC | 3000-6500k | 2450lm | 120° | 210*147*37mm | 0.765 kgs |
| USQFL50 | 50W | 220-240V/AC | 3000-6500k | 4000lm | 120° | 260*182*41mm | 1.6 kgs |