



# USCL3/5 - Ultra Slim Rechargeable Cabinet Light Instructions

## 100x70mm - Two Sides





**Ultra Slim Rechargeable Cabinet Light**

USCL3      USCL5

 **User Instructions**


Please read these instructions and retain them for future reference.

**IP20**        

**Important information**




- Use the supplied USB charging cable when connecting the ultra slim cabinet light to the power supply.
- Charge the battery before using.

**Dimensions:**

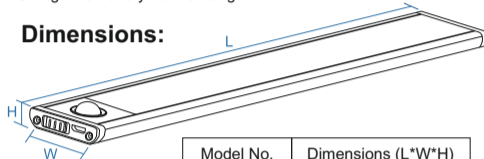



Model No.	Dimensions (L*W*H)
USCL3	300*40*9mm
USCL5	500*40*9mm

**Package Includes:**

Images	Part Name	Specification	Quantity
	LED Light	3W / 180lm 5W / 300lm	1 Pcs
	Metal Clips with 3M Double Sided Tape Fitted	40*35*4.1mm	2 Pcs
	USB Cable	Micro USB 30cm	1 Pcs


**Specifications:**

Image		
Model No.	USCL3	USCL5
Power(W)	3W	5W
LED Type	SMD4014	
LED Qty (PCS)	48 PCS	86 PCS
CCT (K)	3000K/4000K	
Luminous Flux (lm)	180±10%(Max)	300±10%(Max)
CRi (Ra)	>80	
Battery Type	Polymer/3.7V	Polymer/3.7V
Battery Capacity	1500mA	3000mA
Slide Switch	ON/OFF/AUTO	
Delay Time	30 sec.	
Lux Threshold	40 lux	
Working Time	>2.5 hours	
Charge Time	3-4 hours	
Shell Material	ABS+PC	
Operation Temperature	-20°~+45°C	
Storage Temperature	-20°~+55°C (25°C is best fit)	
IP Rating	IP20	

100.00 mm

70.00 mm

**Undercabinet Light Features:**

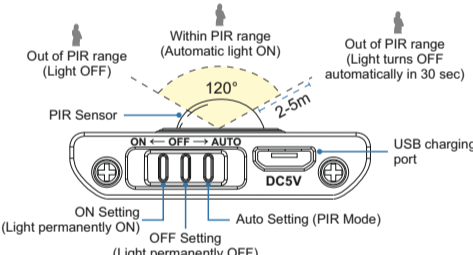

**Slide Switch Guidance:**

ON - The LED light will stay on continuously  
 OFF - The LED light will be off  
 AUTO - Motion sensor and light sensor are now activated.  
 When dark, if motion is detected by the sensor, the light will turn on automatically.  
 Once no movement is detected the light will automatically turn off after 30 seconds.


**Multiple Charging Methods:**

The Ultra Slim Undercabinet Light has an incorporated rechargeable lithium battery that allows the user to charge the device with the micro USB cable provided. The battery is NOT removable, therefore the user must take the lamp down for charging. Connect the cabinet light with the USB cable to a charging adaptor, laptop or computer. The battery will be fully charged within 3-4 hours.

**USB adaptor (not included)**

Charge with a laptop/computer

When the top LED light indicates RED, the battery is still charging. When the top LED light indicates BLUE, that means the battery is fully charged.

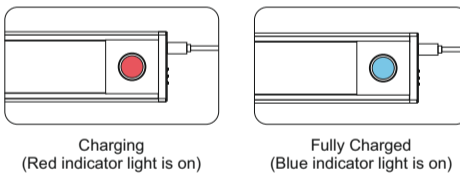

**Installation Method:**


**Magnet-type Easy Installation**

The back of the lamp has built in magnets that allows the user to mount the light on any metal surface or attach the lamp on any desired surface with the two metal plates provided. This makes the installation process and mounting/unmounting very easy.

**Follow the installation steps below:**

1. Clean the installation surface using a soft cloth.
2. Place the metal clips on the magnetic zones at the back of the light.
3. Remove the protective film from the 3M tape.
4. Attach the lamp in the desired position.
5. Test the cabinet light.

**Magnet Installation Procedure:**

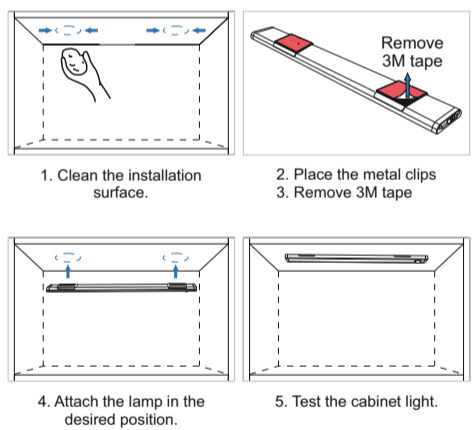

1. Clean the installation surface.
2. Place the metal clips
3. Remove 3M tape
4. Attach the lamp in the desired position.
5. Test the cabinet light.

**Cautions:**

1. Keep away from inflammable and explosive materials when charging. The charging time should not exceed 12 hours.
2. Do not immerse the product in water.
3. Do not mount near naked flames or hot surfaces, may cause combustion or explosion.
4. Follow the installation procedure of the manual, the company will not accept any responsibility caused by improper installation or property loss due to poor installation.
6. Make sure the PIR Sensor is uncovered.
7. Use a dry soft cloth for cleaning.