








AC Direct LED LoPro9 Light

Decorative surface mounting LED downlight luminaire comprising of aluminium housing with transparent lens & AC direct LED chip. Ideal for domestic or commercial dwellings with concrete or solid ceilings.

Dimensions:

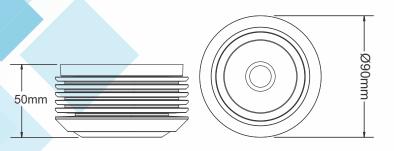

Key specifications:

Voltage Range: 220-240V/AC

Frequency: 50/60HzLED Type: COB LED

Housing: Aluminium Alloy & PC Lens

Body finish: Silver & White

Rated Load: 9W

Lumen Output: 765± lumens

Beam Angle: 120°

Colour: Warm White, Cool White, Daylight

Power Factor > 0.90

• CRI > 80

• IP Rating: IP44

Dimmable

Long Life - 3 year guarantee







