



NEW design LED Ultra Slim Floodlights for exterior/interior, with microwave sensor and remote control.
Applications include: Gardens, Bushes/Shrubs, Security Lighting, Porch Lighting and Area Floodlighting, Factories, Offices

Features:

- Voltage Range: 220-240V
- Beam Angle: 120°
- IP Rating: IP66
- Warranty: 3 Years
- Die Cast Aluminium Casing
- Shatter Resistant Tempered Glass
- Not Dimmable
- Optional Garden Spike(not included)
- Adjustable Bracket
- Optional Garden Spike
- Pre wired with 60cm rubberised cable

Sensor Specifications:

- Detection Range: 1-8m
- Time adjustment: 5sec - 24h
- Detection Angle: 160°
- Manual Override Facility
- 6 Adjustable Modes


Specifications:

High quality tempered glass

Die-casting aluminum body



Dimensions (mm):

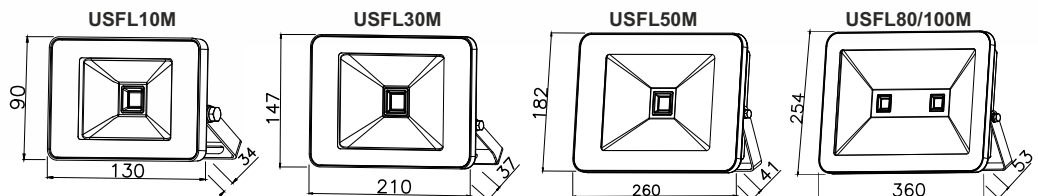

Model	Power	Voltage	CCT	Lumens	Beam Angle	Dimensions	Weight
USFL10M	10W	220-240V/AC	3000/6500k	700lm	120°	130*90*34mm	0.36 kgs
USFL30M	30W	220-240V/AC	3000/6500k	2450lm	120°	210*147*37mm	0.765 kgs
USFL50M	50W	220-240V/AC	3000/6500k	4000lm	120°	260*182*41mm	1.6 kgs
USFL80M	80W	220-240V/AC	3000/6500k	6400lm	120°	360*254*53mm	3.1 kgs
USFL100M	100W	220-240V/AC	3000/6500k	7700lm	120°	360*254*53mm	3.1 kgs