

LEDTEK®
Energy Saving LED



SCLED IP66 LED Waterproof Fitting



Applications:

- Industrial areas
- Garages and workshops

Construction:

- Polycarbonate body
- Opal Polycarbonate Diffuser
- Multiple Cable Conduit Entries
- Metal LED Gear Tray
- Detachable Terminal Block
- Supplied with 2 glands
- Complete with Stainless Steel Mounting Brackets

Specifications:



- AC220-240V, 50/60Hz
- IP Rating: IP66
- LED Chips: SMD2835, 120Lm/W
- Lifespan: 50000 hours
- CCT: 4000K
- RA>80, PF>0.9
- Beam Angle: 120°
- Temperature: -10° ~ +40°
- Storage Temperature: -20° ~ +80°
- 90° Lock-in Clip Design with Security Screws
- Non-Isolated Flicker Free Driver, ENEC Certified
- Warranty: 5 Years





Available Models:

	SCLED124-4F	SCLED220-4F	SCLED130-5F	SCLED230-5F
Rated power	20W	40W	30W	60W
Lumen Output(Lm)	2400	4800	3600	7200
Input current(A)	0.15	0.25	0.17	0.3

Single

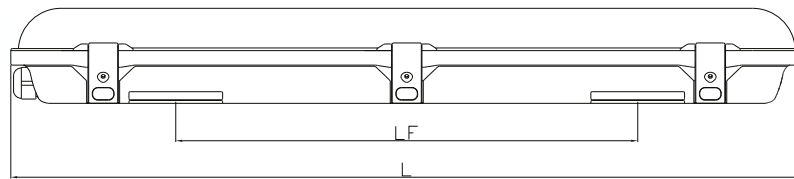

Twin

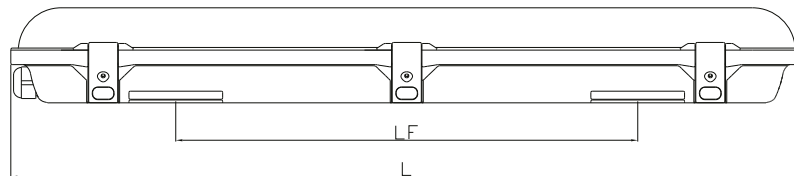

Size	L(mm)	W(mm)	H(mm)	LF(mm)
SCLED124-4F	1200	80	72	780
SCLED220-4F	1200	100	72	780
SCLED130-5F	1500	80	72	1080
SCLED230-5F	1500	100	72	1080

Options:

- Plug & Play Emergency Kit and Microwave Sensor available (sold separately)