


提供客户数据

LAMP PHOTOMETRIC REPORT

Electrical: Voltage:220.1V Current:0.0409A Power:8.517W Factor:0.9473		
MODEL: T8LED-0.6m-8W/T8LED-0.6m-8W		
POWER: 8W	VOLTAGE: 220V	WORKING VOLTAGE: 220V
MANUFACTURER: JXSP		Eff.: 134.53 lm/W

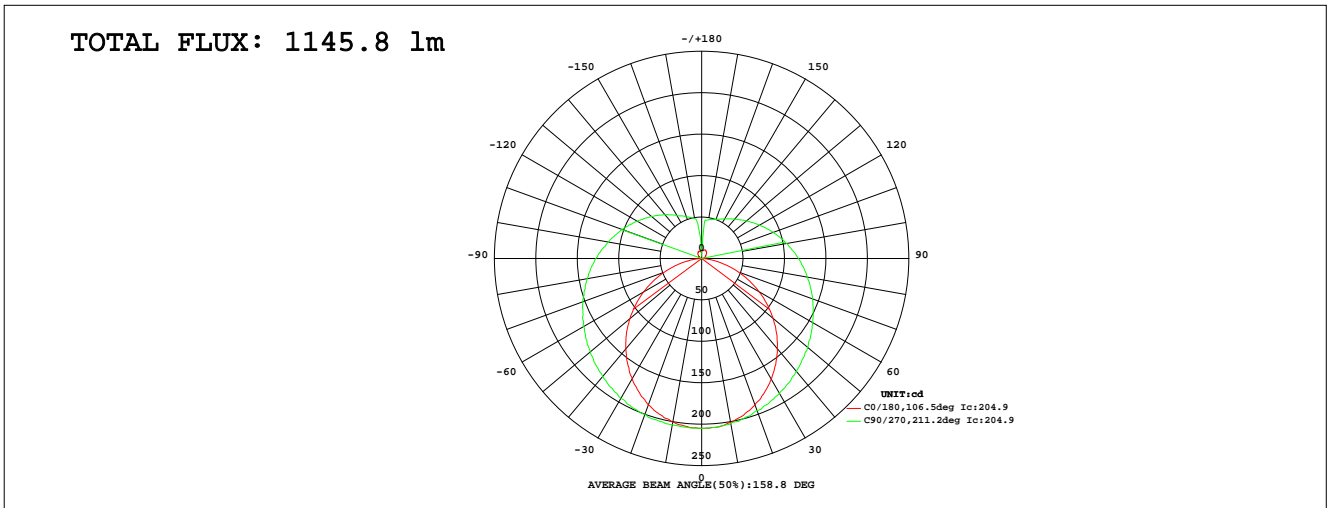

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%
10	200.8	201.0	202.2	201.2	200.6	202.7	203.8	203.0	0- 10	19.43	19.43	1.7
20	188.0	191.8	195.6	191.5	187.8	194.4	200.3	195.2	10- 20	56.00	75.43	6.58
30	168.0	176.8	187.8	177.2	167.5	181.7	194.8	182.8	20- 30	86.27	161.7	14.1
40	142.0	160.2	177.9	159.5	142.7	165.8	186.0	165.9	30- 40	107.4	269.1	23.5
50	112.8	141.1	167.0	141.4	113.0	148.1	175.6	147.8	40- 50	118.4	387.5	33.8
60	79.96	122.6	154.8	123.0	80.95	128.9	164.7	129.7	50- 60	119.5	506.9	44.2
70	46.49	105.8	142.3	106.5	47.55	112.1	152.5	112.8	60- 70	112.3	619.3	54
80	15.94	90.46	129.6	90.44	16.83	97.46	140.5	97.30	70- 80	99.89	719.2	62.8
90	0	77.45	116.7	78.78	0	84.28	127.7	84.86	80- 90	85.87	805.0	70.3
100	0	67.12	104.4	69.30	0.0051	74.45	114.5	75.31	90-100	74.29	879.3	76.7
110	4.348	59.92	92.05	61.45	2.720	66.69	102.3	67.38	100-110	64.61	943.9	82.4
120	5.670	54.17	80.46	55.46	3.967	60.34	90.02	60.72	110-120	55.17	999.1	87.2
130	7.060	50.52	70.29	50.13	4.975	56.00	78.83	56.46	120-130	45.97	1045	91.2
140	9.398	48.43	62.07	47.61	7.157	52.37	68.91	53.35	130-140	37.22	1082	94.5
150	10.57	47.42	55.37	46.91	8.782	49.05	60.00	52.50	140-150	28.84	1111	97
160	11.04	47.03	50.31	46.44	9.479	46.16	53.54	51.10	150-160	20.41	1132	98.8
170	9.559	45.80	47.47	37.71	8.393	33.20	48.96	48.22	160-170	11.49	1143	99.8
180	11.81	9.763	2.903	8.614	11.97	12.02	8.174	9.493	170-180	2.745	1146	100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators:RJC  
 Test Date:2019-04-02

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.291  
 Humidity: 34.9%  
 Test Distance:30.000m [K=1.0000]  
 Remarks: 190401014SX01

LUMINOUS DISTRIBUTION INTENSITY DATA

Electrical: Voltage:220.1V Current:0.0409A Power:8.517W Factor:0.9473		
MODEL: T8LED-0.6m-8W/T8LED-0.6m-8W		
POWER: 8W	VOLTAGE: 220V	WORKING VOLTAGE: 220V
MANUFACTURER: JXSP		Eff.: 134.53 lm/W

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	205	205	205	205	205	205	205	205	205	205	205	205	205	205	205	205			
5	204	204	204	204	205	204	204	204	204	204	204	205	205	206	204	204			
10	201	200	201	201	202	202	201	201	201	201	203	204	204	205	203	202			
15	196	196	197	198	199	199	197	195	195	197	199	201	203	203	200	197			
20	188	189	192	194	196	196	192	189	188	190	194	198	200	200	195	191			
25	179	181	184	190	192	191	185	180	178	182	188	195	198	196	189	183			
30	168	171	177	184	188	185	177	170	168	173	182	190	195	191	183	173			
35	156	160	168	178	183	180	169	159	156	162	174	185	190	186	175	162			
40	142	147	160	171	178	174	160	147	143	150	166	180	186	182	166	151			
45	128	135	150	166	172	167	151	133	129	138	156	174	181	176	157	138			
50	113	121	141	160	167	161	141	120	113	125	148	168	176	169	148	125			
55	96.6	108	132	152	161	154	132	107	97.3	111	138	161	170	162	139	112			
60	80.0	94.7	123	145	155	146	123	93.7	80.9	98.2	129	154	165	156	130	98.2			
65	63.4	81.4	114	139	148	139	114	81.0	64.2	85.5	121	148	158	148	121	85.2			
70	46.5	69.5	106	132	142	132	107	69.2	47.6	73.0	112	141	152	141	113	72.9			
75	30.3	58.4	98.0	125	136	125	98.6	58.4	31.5	61.7	105	135	146	134	105	62.0			
80	15.9	48.6	90.5	119	130	119	90.4	49.5	16.8	52.2	97.5	129	141	128	97.3	52.2			
85	4.51	41.0	84.0	112	123	113	84.3	41.7	4.93	44.4	90.9	122	134	122	89.9	44.0			
90	0.00	35.3	77.4	105	117	107	78.8	36.6	0.00	38.0	84.3	115	128	116	84.9	37.5			
95	0.00	31.6	71.6	98.7	110	101	74.0	33.5	0.00	33.6	78.5	109	121	111	80.0	33.7			
100	0.00	29.8	67.1	93.2	104	95.7	69.3	31.1	0.01	32.0	74.4	102	114	105	75.3	31.9			
105	2.47	28.7	63.3	87.2	98.1	90.2	64.9	30.1	1.73	32.0	70.6	96.3	108	99.1	71.0	31.8			
110	4.35	28.6	59.9	82.0	92.1	85.0	61.5	29.8	2.72	32.2	66.7	91.8	102	93.6	67.4	32.1			
115	4.81	28.7	56.6	77.4	86.1	79.8	58.2	29.2	3.04	33.1	63.7	86.5	96.2	87.8	63.7	32.9			
120	5.67	29.9	54.2	73.2	80.5	75.0	55.5	28.4	3.97	34.5	60.3	81.6	90.0	82.6	60.7	33.9			
125	5.91	31.8	52.2	68.6	75.4	70.3	53.4	30.3	4.20	36.0	58.1	76.6	84.3	77.7	58.3	35.3			
130	7.06	33.6	50.5	64.9	70.3	66.0	50.1	32.0	4.98	37.7	56.0	71.9	78.8	72.9	56.5	37.1			
135	8.24	35.6	49.2	61.2	65.9	62.4	47.6	34.0	5.91	39.4	54.1	67.7	73.7	68.8	54.7	38.9			
140	9.40	37.8	48.4	58.1	62.1	58.2	47.6	35.9	7.16	40.9	52.4	63.9	68.9	65.2	53.3	40.6			
145	10.1	39.6	47.8	55.2	58.5	55.3	47.3	37.7	7.94	41.7	50.5	59.8	64.3	61.8	52.9	42.8			
150	10.6	41.4	47.4	52.7	55.4	52.8	46.9	39.5	8.78	41.9	49.0	56.1	60.0	59.1	52.5	45.0			
155	11.0	42.4	47.1	50.9	52.5	50.8	46.7	41.2	9.40	41.0	48.0	53.1	56.8	56.6	52.0	47.0			
160	11.0	43.2	47.0	49.1	50.3	49.4	46.4	41.6	9.48	27.9	46.2	50.4	53.5	54.0	51.1	47.6			
165	10.9	42.5	46.8	48.2	48.9	48.3	46.3	40.8	8.63	18.6	44.1	49.0	51.3	51.3	49.7	47.6			
170	9.56	23.0	45.8	47.0	47.5	47.1	37.7	30.4	8.39	9.17	33.2	42.9	49.0	49.2	48.2	46.5			
175	9.86	14.0	22.3	38.8	46.2	27.7	24.5	15.1	9.73	9.83	17.7	28.5	32.1	45.8	44.9	31.3			
180	11.8	11.6	9.76	7.22	2.90	7.06	8.61	9.89	12.0	11.8	12.0	11.4	8.17	3.57	9.49	9.67			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators:RJC  
 Test Date:2019-04-02

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.291  
 Humidity: 34.9%  
 Test Distance:30.000m [K=1.0000]  
 Remarks: 190401014SX01

Photometric Data Table [cd]

G/C	0.0	22.5	45.0	67.5	90.0	112.5	135.0	157.5	180.0	202.5
0.0	204.9	204.9	204.9	204.9	204.9	204.9	204.9	204.9	204.9	204.9
2.5	204.9	204.9	204.9	204.4	204.6	205.1	204.9	204.7	204.6	204.7
5.0	204.4	204.5	204.1	203.8	204.6	204.4	204.1	203.9	203.6	204.1
7.5	203.2	203.0	203.0	202.7	203.3	203.1	203.2	202.6	202.5	203.1
10.0	200.8	200.4	201.0	201.1	202.2	202.0	201.2	200.5	200.6	201.4
12.5	198.0	198.4	199.8	199.8	201.3	200.3	199.4	197.9	197.8	199.5
15.0	195.7	195.7	197.4	197.6	199.5	199.4	197.0	195.0	194.8	196.8
17.5	192.1	192.3	194.8	196.2	198.2	197.8	194.5	192.3	191.9	194.1
20.0	188.0	189.4	191.8	194.4	195.6	195.8	191.5	188.7	187.8	190.2
22.5	184.1	184.9	188.3	191.6	193.9	193.2	188.3	184.0	182.9	187.0
25.0	178.9	180.9	184.5	189.8	192.4	190.9	184.8	179.9	178.4	182.4
27.5	173.6	176.2	181.0	186.8	189.8	188.4	181.6	174.7	173.2	178.0
30.0	168.0	170.8	176.8	184.5	187.8	185.2	177.2	170.1	167.5	173.0
32.5	162.0	165.7	172.9	181.5	185.7	182.7	173.0	164.4	162.2	167.8
35.0	155.8	159.7	168.3	178.0	183.2	180.0	169.1	158.8	155.7	161.9
37.5	149.2	154.0	164.3	175.6	180.1	176.9	164.5	152.5	149.1	156.2
40.0	142.0	147.3	160.2	171.4	177.9	174.1	159.5	146.7	142.7	150.3
42.5	135.0	140.9	155.5	168.6	175.2	170.6	155.2	139.5	135.3	143.7
45.0	128.0	134.8	150.5	166.0	172.0	167.2	150.9	133.1	128.5	137.8
47.5	120.5	127.8	146.0	162.4	169.1	163.8	146.0	127.1	120.8	131.4
50.0	112.8	121.4	141.1	159.5	167.0	161.0	141.4	120.3	113.0	124.6
52.5	104.5	114.5	136.7	155.6	163.5	157.3	136.9	113.7	105.0	118.2
55.0	96.61	107.9	131.6	152.0	160.9	154.0	132.4	107.1	97.29	111.4
57.5	88.36	101.4	127.6	149.0	158.0	150.3	127.7	100.6	89.14	105.0
60.0	79.96	94.68	122.6	145.4	154.8	146.3	123.0	93.71	80.95	98.20
62.5	71.58	88.08	118.4	142.2	151.8	142.8	118.6	87.19	72.56	91.64
65.0	63.43	81.45	114.2	139.1	148.4	139.2	114.2	81.02	64.21	85.48
67.5	54.65	75.22	110.1	135.3	145.3	135.7	110.3	74.97	55.84	79.05
70.0	46.49	69.52	105.8	131.8	142.3	132.1	106.5	69.17	47.55	73.00
72.5	38.32	63.77	101.5	128.2	139.2	128.6	102.6	63.47	39.34	67.51
75.0	30.31	58.40	98.02	125.0	135.8	125.3	98.55	58.45	31.55	61.74
77.5	22.78	53.19	94.15	121.5	133.0	122.2	94.52	53.66	24.01	56.75
80.0	15.94	48.59	90.46	118.8	129.6	118.9	90.44	49.46	16.83	52.24
82.5	9.635	44.76	87.30	115.4	126.4	115.8	87.21	45.43	10.33	48.03
85.0	4.510	41.04	83.95	111.8	123.3	112.9	84.27	41.67	4.935	44.38
87.5	0.9363	37.92	80.51	108.4	120.1	109.8	81.39	38.89	0.7688	41.03
90.0	0	35.31	77.45	105.1	116.7	107.1	78.78	36.60	0	37.97
92.5	0	33.26	74.26	102.3	113.7	104.2	76.52	34.73	0	35.35
95.0	0	31.55	71.56	98.69	110.4	101.4	73.96	33.49	0	33.63
97.5	0	30.53	69.15	95.97	107.0	98.58	71.64	32.10	0.0033	32.46
100.0	0	29.83	67.12	93.17	104.4	95.67	69.30	31.09	0.0051	32.00
102.5	0.9172	29.13	65.25	90.35	101.3	93.14	67.27	30.47	0.6244	32.00
105.0	2.472	28.66	63.32	87.16	98.12	90.23	64.86	30.08	1.725	32.00
107.5	3.645	28.65	61.54	84.37	95.04	87.41	63.24	29.85	2.871	32.01
110.0	4.348	28.59	59.92	81.96	92.05	84.97	61.45	29.84	2.720	32.24
112.5	4.661	28.58	58.43	79.84	89.20	81.97	59.80	29.84	2.642	32.63
115.0	4.812	28.65	56.58	77.44	86.13	79.79	58.17	29.16	3.036	33.10
117.5	5.518	29.13	55.41	75.33	83.30	77.12	56.85	28.29	3.501	33.88
120.0	5.670	29.90	54.17	73.15	80.46	74.99	55.46	28.44	3.967	34.50
122.5	5.910	30.67	53.09	70.74	78.02	72.55	54.45	29.37	4.271	35.13
125.0	5.906	31.75	52.15	68.57	75.42	70.28	53.36	30.29	4.201	35.98
127.5	6.209	32.69	51.30	66.79	73.11	68.08	52.12	31.14	4.434	36.99
130.0	7.060	33.62	50.52	64.91	70.29	66.03	50.13	32.00	4.975	37.69
132.5	7.685	34.64	49.75	62.96	68.39	64.38	47.77	32.99	5.444	38.47
135.0	8.238	35.58	49.21	61.25	65.95	62.41	47.61	34.00	5.913	39.41
137.5	8.775	36.60	48.74	59.54	64.13	60.45	47.61	34.93	6.453	40.18
140.0	9.398	37.83	48.43	58.13	62.07	58.25	47.61	35.95	7.157	40.88
142.5	9.715	38.76	48.19	56.66	60.19	56.68	47.53	36.87	7.698	41.42
145.0	10.10	39.63	47.81	55.17	58.52	55.25	47.30	37.73	7.936	41.66
147.5	10.49	40.33	47.58	53.92	56.86	53.91	47.14	38.49	8.393	41.89
150.0	10.57	41.41	47.42	52.68	55.37	52.82	46.91	39.50	8.782	41.89
152.5	10.72	42.12	47.34	51.66	53.86	51.71	46.67	40.20	9.171	41.58
155.0	11.03	42.36	47.11	50.89	52.52	50.77	46.67	41.20	9.404	40.95
157.5	10.96	42.90	47.11	49.95	51.26	50.14	46.60	41.59	9.404	39.08
160.0	11.04	43.21	47.03	49.10	50.31	49.43	46.44	41.59	9.479	27.90
162.5	11.04	43.21	47.03	48.64	49.45	48.73	46.28	42.36	9.093	22.96
165.0	10.88	42.54	46.81	48.24	48.89	48.33	46.28	40.85	8.627	18.60
167.5	10.11	36.73	46.34	48.01	48.26	48.02	44.37	36.04	8.393	13.41
170.0	9.559	22.96	45.80	47.00	47.47	47.08	37.71	30.42	8.393	9.171
172.5	9.248	15.02	39.45	46.22	46.92	43.52	30.68	20.23	8.399	8.875
175.0	9.857	14.02	22.35	38.82	46.15	27.72	24.48	15.08	9.726	9.827
177.5	10.80	11.04	14.46	13.84	11.44	10.37	13.75	14.23	11.42	11.30
180.0	11.81	11.61	9.763	7.223	2.903	7.058	8.614	9.890	11.97	11.84

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators:RJC  
 Test Date:2019-04-02

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.291  
 Humidity: 34.9%  
 Test Distance:30.000m [K=1.0000]  
 Remarks: 190401014SX01

Photometric Data Table [cd]

G/C	225.0	247.5	270.0	292.5	315.0	337.5
0.0	204.9	204.9	204.9	204.9	204.9	204.9
2.5	204.9	204.9	204.9	205.4	204.6	204.9
5.0	204.4	204.9	204.5	205.6	204.4	204.1
7.5	203.7	204.2	204.2	205.0	203.8	203.5
10.0	202.7	204.1	203.8	204.5	203.0	201.6
12.5	201.3	202.5	203.9	203.2	200.6	199.5
15.0	198.9	201.3	202.7	202.7	199.5	196.8
17.5	196.8	200.4	202.5	200.9	197.3	194.4
20.0	194.4	198.2	200.3	199.7	195.2	191.1
22.5	191.7	196.7	199.4	197.2	192.2	187.2
25.0	188.4	195.1	198.5	196.1	189.3	182.8
27.5	185.3	192.2	196.6	193.4	186.1	178.4
30.0	181.7	190.1	194.8	190.9	182.8	173.4
32.5	177.9	187.8	192.3	189.2	178.5	167.8
35.0	174.1	185.2	190.2	186.4	175.2	162.4
37.5	170.2	182.7	188.1	184.1	170.0	156.7
40.0	165.8	179.7	186.0	181.6	165.9	150.6
42.5	161.0	176.7	183.5	178.6	161.3	144.8
45.0	156.3	173.6	181.0	175.5	157.1	138.4
47.5	152.3	170.5	177.8	171.8	152.2	132.0
50.0	148.1	168.0	175.6	169.1	147.8	125.2
52.5	142.9	164.1	172.9	165.7	143.4	118.7
55.0	138.3	160.9	170.2	162.5	139.0	111.8
57.5	133.8	157.7	167.1	159.2	134.2	104.9
60.0	128.9	154.3	164.7	155.6	129.7	98.25
62.5	124.7	151.7	161.3	151.9	124.7	91.76
65.0	120.8	148.1	157.9	148.3	121.0	85.24
67.5	116.2	144.9	155.6	145.0	116.6	79.01
70.0	112.1	141.4	152.5	140.9	112.8	72.95
72.5	108.4	138.3	148.8	137.8	108.7	67.09
75.0	104.6	134.8	146.1	134.1	104.8	61.98
77.5	101.3	131.2	143.3	130.4	100.9	56.73
80.0	97.46	128.7	140.5	127.6	97.30	52.25
82.5	94.06	125.3	137.1	124.7	93.41	47.92
85.0	90.92	121.6	134.3	122.2	89.95	43.99
87.5	87.86	118.5	130.6	119.2	87.52	40.20
90.0	84.28	114.7	127.7	116.4	84.86	37.55
92.5	81.27	111.6	124.5	113.7	82.54	35.32
95.0	78.46	108.6	121.2	110.7	80.05	33.70
97.5	76.38	105.0	117.1	107.8	77.63	32.70
100.0	74.45	102.2	114.5	104.8	75.31	31.85
102.5	72.43	98.79	111.5	101.6	73.29	31.77
105.0	70.64	96.30	108.2	99.07	70.96	31.77
107.5	68.69	93.58	105.1	96.08	69.18	31.78
110.0	66.69	91.78	102.3	93.56	67.38	32.08
112.5	65.08	89.06	99.24	90.43	65.61	32.40
115.0	63.73	86.49	96.15	87.82	63.65	32.87
117.5	61.89	84.00	92.94	85.23	62.26	33.48
120.0	60.34	81.59	90.02	82.57	60.72	33.94
122.5	59.25	78.78	86.97	80.20	59.39	34.72
125.0	58.11	76.56	84.30	77.71	58.32	35.33
127.5	57.03	74.22	81.38	75.20	57.31	36.10
130.0	56.00	71.87	78.83	72.92	56.46	37.11
132.5	55.09	69.87	76.33	70.88	55.45	37.88
135.0	54.14	67.74	73.72	68.76	54.75	38.90
137.5	53.15	65.50	71.27	66.79	53.97	39.82
140.0	52.37	63.94	68.91	65.21	53.35	40.59
142.5	51.53	61.69	66.77	63.41	53.04	41.60
145.0	50.51	59.83	64.34	61.76	52.89	42.75
147.5	49.82	57.88	62.05	60.42	52.81	43.84
150.0	49.05	56.09	60.00	59.09	52.50	45.00
152.5	48.12	54.62	58.03	57.83	52.34	46.08
155.0	47.96	53.06	56.85	56.65	52.03	47.01
157.5	47.03	51.74	55.41	55.63	51.72	47.70
160.0	46.16	50.42	53.54	53.98	51.10	47.62
162.5	45.33	49.87	52.28	52.73	50.40	47.62
165.0	44.07	49.02	51.25	51.31	49.70	47.62
167.5	39.00	46.93	49.99	50.20	48.93	47.23
170.0	33.20	42.90	48.96	49.18	48.22	46.46
172.5	21.89	32.97	45.54	47.62	47.05	43.02
175.0	17.74	28.47	32.07	45.81	44.88	31.32
177.5	16.66	15.94	13.47	23.84	19.79	18.68
180.0	12.02	11.45	8.174	3.573	9.493	9.673

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators:RJC  
 Test Date:2019-04-02

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.291  
 Humidity: 34.9%  
 Test Distance:30.000m [K=1.0000]  
 Remarks: 190401014SX01

TEST :

CHECK :