


提供客户数据

LAMP PHOTOMETRIC REPORT

Electrical: Voltage:220.0V Current:0.0796A Power:16.69W Factor:0.9531		
MODEL: T8LED-1.2m-17W/T8LED-1.2m-17W		
POWER: 17W	VOLTAGE: 220V	WORKING VOLTAGE: 220V
MANUFACTURER: JXSP		Eff.: 136.40 lm/W

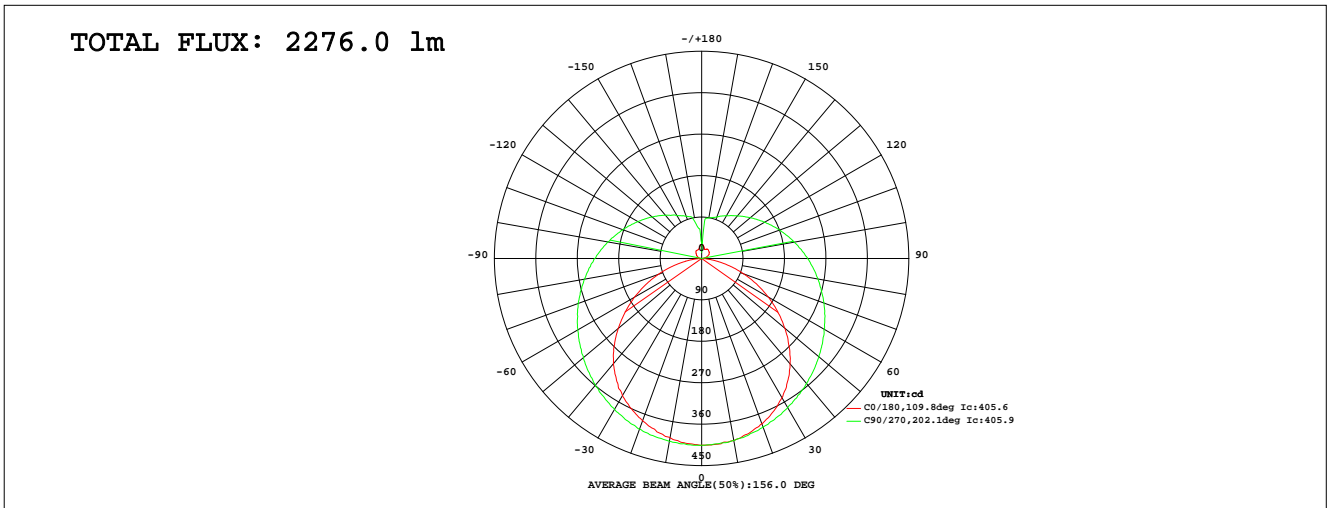

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%
10	401.6	402.8	401.6	399.1	395.4	399.9	403.0	401.5	0- 10	38.48	38.48	1.69
20	382.0	390.6	390.0	380.2	375.1	382.9	394.4	384.4	10- 20	111.3	149.8	6.58
30	349.1	368.4	374.0	351.7	343.9	362.1	378.2	358.6	20- 30	172.7	322.5	14.2
40	298.9	339.4	354.3	317.7	298.3	335.4	359.1	325.2	30- 40	216.7	539.2	23.7
50	236.1	302.8	332.7	280.0	237.1	304.4	335.1	287.9	40- 50	239.5	778.7	34.2
60	166.8	263.1	307.3	243.5	168.5	267.6	310.4	249.9	50- 60	241.0	1020	44.8
70	96.11	225.5	282.6	209.8	99.04	230.5	285.1	213.1	60- 70	225.1	1245	54.7
80	32.80	193.8	256.8	179.7	35.53	198.0	258.6	183.1	70- 80	198.4	1443	63.4
90	0.0042	166.0	230.4	155.6	0.0793	168.5	232.1	156.8	80- 90	168.9	1612	70.8
100	3.871	144.7	204.5	136.9	3.185	147.0	206.9	138.2	90-100	145.1	1757	77.2
110	12.73	128.1	180.5	121.0	8.528	131.0	182.4	121.6	100-110	125.8	1883	82.7
120	18.74	116.1	157.8	109.7	12.42	117.8	160.3	109.5	110-120	107.4	1990	87.5
130	21.66	107.9	138.1	102.5	15.51	109.2	140.6	101.2	120-130	89.84	2080	91.4
140	23.29	102.5	121.1	97.00	19.98	102.6	122.6	96.00	130-140	72.94	2153	94.6
150	23.79	99.49	107.2	92.68	20.70	96.45	107.8	94.57	140-150	56.36	2209	97.1
160	20.79	96.16	95.56	79.78	20.71	78.13	97.57	93.28	150-160	39.15	2249	98.8
170	26.78	92.85	89.69	72.67	26.06	78.19	78.96	85.84	160-170	21.51	2270	99.7
180	31.31	28.88	12.86	24.43	30.52	33.72	28.42	26.22	170-180	5.826	2276	100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3DEG
 Operators:RJC
 Test Date:2019-04-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 38.6%
 Test Distance:30.000m [K=1.0000]
 Remarks: 190401014SX02

LUMINOUS DISTRIBUTION INTENSITY DATA

Electrical: Voltage:220.0V Current:0.0796A Power:16.69W Factor:0.9531		
MODEL: T8LED-1.2m-17W/T8LED-1.2m-17W		
POWER: 17W	VOLTAGE: 220V	WORKING VOLTAGE: 220V
MANUFACTURER: JXSP		Eff.: 136.40 lm/W

Table--1 UNIT: cd

C(DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	406	406	406	406	406	406	406	406	406	406	406	406	406	406	406	406			
5	405	405	406	405	404	404	404	405	403	402	404	405	405	406	406	404			
10	402	400	403	402	402	400	399	400	395	397	400	401	403	404	402	400			
15	394	394	398	398	397	394	391	391	386	387	392	395	399	398	394	393			
20	382	385	391	393	390	387	380	380	375	377	383	388	394	392	384	382			
25	367	371	380	385	382	378	368	365	360	365	372	380	388	384	372	370			
30	349	356	368	376	374	367	352	347	344	349	362	371	378	374	359	352			
35	326	338	355	364	364	356	335	325	323	332	349	361	369	363	342	331			
40	299	316	339	353	354	343	318	299	298	314	335	351	359	351	325	308			
45	268	290	323	341	344	330	299	274	269	291	320	339	348	337	306	281			
50	236	262	303	329	333	317	280	246	237	265	304	327	335	324	288	254			
55	202	233	283	315	321	302	262	219	203	237	286	315	323	310	270	225			
60	167	204	263	302	307	289	243	193	169	208	268	302	310	295	250	197			
65	132	175	244	287	296	275	227	166	134	179	249	289	297	280	231	171			
70	96.1	149	226	272	283	260	210	142	99.0	153	230	276	285	266	213	146			
75	62.9	125	210	259	269	245	195	120	66.1	128	213	262	272	251	198	123			
80	32.8	105	194	244	257	232	180	101	35.5	108	198	248	259	235	183	103			
85	9.60	89.1	179	231	243	221	166	86.1	11.1	91.4	184	235	246	224	168	87.1			
90	0.00	76.3	166	216	230	209	156	75.4	0.08	78.5	168	220	232	212	157	74.2			
95	0.00	69.4	153	203	218	197	146	69.2	0.25	70.1	155	207	219	200	147	66.6			
100	3.87	64.9	145	189	205	186	137	64.8	3.18	65.0	147	193	207	189	138	62.0			
105	9.48	63.1	136	179	192	176	129	62.6	7.00	64.0	139	182	194	177	129	60.5			
110	12.7	63.0	128	168	180	164	121	62.2	8.53	64.4	131	172	182	166	122	60.6			
115	16.1	63.9	122	158	169	155	115	62.7	10.5	65.7	124	161	171	156	115	61.8			
120	18.7	66.4	116	149	158	145	110	64.9	12.4	68.1	118	152	160	146	109	64.2			
125	20.1	69.6	111	140	147	137	106	67.7	13.8	71.3	113	142	150	137	105	67.0			
130	21.7	73.4	108	132	138	129	103	70.9	15.5	74.9	109	134	141	128	101	70.3			
135	22.3	77.2	105	124	129	121	99.1	73.3	17.5	78.1	106	126	132	121	98.2	74.0			
140	23.3	81.1	103	118	121	115	97.0	75.7	20.0	81.7	103	119	123	114	96.0	77.9			
145	24.1	85.0	100	112	114	109	94.9	78.6	20.7	83.0	99.5	112	115	109	94.9	81.5			
150	23.8	88.4	99.5	107	107	103	92.7	77.9	20.7	84.5	96.5	106	108	105	94.6	85.4			
155	22.6	90.7	98.6	102	102	98.6	89.1	76.5	20.7	76.1	93.5	100	102	101	94.4	89.1			
160	20.8	90.9	96.2	98.1	95.6	93.8	79.8	71.0	20.7	52.9	78.1	93.5	97.6	97.1	93.3	88.7			
165	23.6	89.9	94.2	95.1	92.0	87.0	72.3	72.2	22.6	36.7	79.4	79.8	94.2	93.7	91.6	88.5			
170	26.8	60.2	92.9	88.7	89.7	72.2	72.7	70.6	26.1	31.8	78.2	77.4	79.0	90.1	85.8	87.3			
175	29.7	40.8	53.4	80.3	86.0	62.5	56.4	39.8	29.1	30.5	46.2	77.0	64.9	86.3	82.8	74.5			
180	31.3	31.0	28.9	26.0	12.9	24.7	24.4	26.1	30.5	31.8	33.7	31.9	28.4	14.1	26.2	26.8			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3DEG
 Operators:RJC
 Test Date:2019-04-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 38.6%
 Test Distance:30.000m [K=1.0000]
 Remarks: 190401014SX02

Photometric Data Table [cd]

G/C	225.0	247.5	270.0	292.5	315.0	337.5
0.0	405.6	405.6	405.6	405.6	405.6	405.6
2.5	405.5	405.5	405.9	405.9	406.1	405.1
5.0	404.5	404.7	404.7	405.6	405.5	404.4
7.5	402.9	403.2	403.8	404.3	403.9	403.0
10.0	399.9	401.4	403.0	403.5	401.5	400.2
12.5	395.7	397.8	400.9	400.3	399.2	396.8
15.0	391.7	394.7	399.4	397.9	394.1	393.2
17.5	387.6	392.1	396.8	394.5	390.3	388.1
20.0	382.9	387.5	394.4	391.7	384.4	381.9
22.5	378.0	383.7	390.8	387.9	379.7	376.1
25.0	372.4	380.0	387.5	383.8	372.2	369.6
27.5	367.1	375.5	382.6	378.1	365.4	360.6
30.0	362.1	371.3	378.2	374.2	358.6	351.5
32.5	355.8	366.0	373.6	368.5	350.8	342.3
35.0	349.0	361.1	368.8	362.9	342.1	331.4
37.5	342.8	356.3	364.9	357.2	333.5	319.4
40.0	335.4	350.9	359.1	350.9	325.2	307.8
42.5	328.2	344.9	352.8	343.4	315.8	294.8
45.0	320.3	339.3	347.6	337.2	305.8	281.0
47.5	311.8	333.6	341.8	330.7	296.5	267.1
50.0	304.4	327.0	335.1	323.9	287.9	254.2
52.5	295.1	321.6	329.0	316.8	278.3	239.8
55.0	286.2	315.3	323.1	309.7	269.6	225.3
57.5	276.9	308.5	317.2	303.3	259.4	211.4
60.0	267.6	302.0	310.4	295.4	249.9	197.3
62.5	257.6	295.5	304.7	287.9	241.0	184.2
65.0	249.2	289.1	297.1	280.0	231.4	171.4
67.5	239.5	282.1	291.7	273.5	222.5	158.4
70.0	230.5	275.7	285.1	265.9	213.1	145.8
72.5	222.3	268.7	278.3	258.0	205.4	134.6
75.0	213.1	261.7	271.9	250.8	198.3	123.0
77.5	205.5	254.6	265.1	242.5	190.6	112.4
80.0	198.0	248.1	258.6	235.2	183.1	103.0
82.5	190.5	241.1	252.0	229.9	175.0	94.69
85.0	183.5	234.6	245.8	224.2	167.5	87.09
87.5	176.1	226.8	238.7	218.5	161.7	79.41
90.0	168.5	219.9	232.1	211.8	156.8	74.21
92.5	162.7	213.3	225.6	205.7	152.5	70.08
95.0	155.1	206.7	219.4	200.3	147.4	66.61
97.5	151.5	200.1	213.1	194.2	142.5	63.95
100.0	147.0	193.0	206.9	188.6	138.2	62.00
102.5	142.6	186.7	200.8	182.6	133.2	60.60
105.0	138.6	182.4	194.4	177.2	129.0	60.52
107.5	134.3	177.3	188.3	171.7	125.2	60.52
110.0	131.0	171.6	182.4	166.3	121.6	60.61
112.5	127.1	166.6	176.7	161.3	118.3	60.93
115.0	124.0	161.4	171.0	156.0	115.0	61.79
117.5	120.7	156.7	165.6	151.1	112.3	62.97
120.0	117.8	152.2	160.3	146.0	109.5	64.22
122.5	115.3	147.1	155.3	141.4	106.7	65.55
125.0	113.0	142.3	150.2	137.0	104.8	67.04
127.5	110.9	137.8	145.3	132.1	102.9	68.52
130.0	109.2	134.0	140.6	128.2	101.2	70.26
132.5	107.7	130.3	136.1	124.2	99.61	71.97
135.0	105.9	126.2	131.5	120.6	98.19	74.03
137.5	104.1	122.4	126.9	117.4	96.91	76.13
140.0	102.6	118.9	122.6	114.4	96.00	77.85
142.5	100.8	115.5	118.6	111.6	95.25	79.73
145.0	99.48	112.1	114.8	109.2	94.87	81.46
147.5	97.84	108.8	112.2	107.1	94.64	83.50
150.0	96.45	105.8	107.8	105.0	94.57	85.38
152.5	95.71	103.0	104.8	102.7	94.49	87.58
155.0	93.49	100.3	102.5	101.3	94.42	89.06
157.5	84.57	98.26	100.1	99.05	93.96	89.61
160.0	78.13	93.53	97.57	97.10	93.28	88.75
162.5	80.40	86.02	95.56	95.14	92.67	88.43
165.0	79.42	79.79	94.19	93.70	91.61	88.51
167.5	79.34	76.88	89.19	91.72	88.71	87.88
170.0	78.19	77.44	78.96	90.06	85.84	87.33
172.5	66.08	76.66	69.87	88.34	84.63	85.21
175.0	46.21	77.01	64.95	86.29	82.79	74.53
177.5	43.63	42.66	42.41	53.87	45.49	42.69
180.0	33.72	31.95	28.42	14.12	26.22	26.76

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3DEG
 Operators:RJC
 Test Date:2019-04-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 38.6%
 Test Distance:30.000m [K=1.0000]
 Remarks: 190401014SX02

TEST :

CHECK :