



Ideal for highlighting and general lighting in retail, commercial and domestic applications. Particularly suitable where flexibility is necessary in installations such as shops, art galleries and exhibitions, and where unobtrusive miniature spotlights are required.

Features



- 50% higher energy saving rate than the traditional metal halide lamp.
- No flicker, no dazzle, healthy to the eye.
- Dimmable: Compatible with most Triac dimmers on the market.
- Environmental protection: meets RoHs requirements; contains no lead or mercury

Applications


Shopping malls, cultural exhibition halls, chain stores, business halls, professional windows, counters and other key lighting places.

Specifications

| | |
|---------------------|--|
| Voltage | 200-260V/AC 50/60Hz |
| Power | 10W / 20W / 30W |
| Power Factor(PF) | >0.90 |
| Lumen Output | FETL10W/B: 700-800Lm FETL20W/B: 1600-1800Lm FETL30W/B: 2400-2800Lm |
| Lumen Efficiency | 90 Lm/W |
| CRI | Minimum 80 |
| CCT | 3 CCT adjustable (3000-5000K) |
| Beam Angle | 36° |
| Electrical Class | Class1 RoHS |
| Working temperature | -35°C < Ta < +35°C |
| Body Colour | Black / White |
| Warranty | 3 year |
| Surge Protection | 2 KV |
| Track adapter | Single Circuit Track |



Dimensional drawing

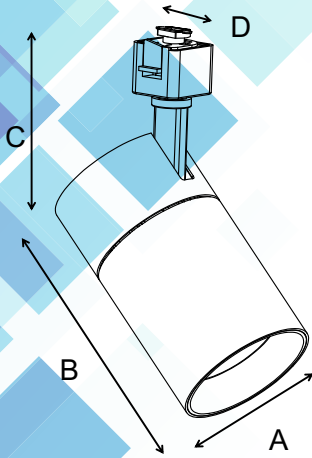

| Power | A mm(inch) | B mm(inch) | C mm(inch) | D mm(inch) |
|-------|---------------|---------------|---------------|---------------|
| 10W | 60(2.36) | 120(4.72) | 131(5.16) | 40(1.57) |
| 20W | 76(2.99) | 139(5.47) | 142(5.59) | 40(1.57) |
| 30W | 88(3.46) | 147(5.79) | 153(6.02) | 40(1.57) |

Packaging information

| Model | Carton size (mm) | QTY. (PCS) | N.W. (kg) | G.W. (kg) |
|--------|------------------|---------------|--------------|--------------|
| FETL10 | 600*310*300 | 36 | 18 | 20 |
| FETL20 | 360*310*400 | 16 | 9 | 9.15 |
| FETL30 | 330*310*430 | 12 | 7 | 8.6 |

