

LEDTEK®
Energy Saving LED



LKTD40-4F-CCT
LKTD60-5F-CCT
LKTD80-6F-CCT

Surface / Suspended Fitting
Power / CCT Selectable
4ft / 5ft / 6ft



Application:

- Corridors
- Schools, colleges and offices

Construction:

- Steel body, white gloss powder coated finish
- Polycarbonate opal diffuser


Specifications:

- Voltage: 220-240V 50/60Hz
- Beam Angle: 120°
- CCT: 3000K / 4000K / 6500K
- CRI: ≥80
- Power Factor: >0.9
- IP Rating: 20
- IK Rating: 08
- Easy wire, push-fit connector block
- Warranty: 5 years
- 4ft 22W / 28W / 34W / 40W
- Lumen: 5300Lm (40W / 4000K)
- Luminous Flux: 136Lm/W (40W / 4000K)
- 5ft 34W / 43W / 52W / 60W
- Lumen: 7800Lm (60W / 4000K)
- Luminous Flux: 139Lm/W (60W / 4000K)
- 6ft 50W / 60W / 70W / 80W
- Lumen: 10400Lm (80W / 4000K)
- Luminous Flux: 132Lm/W (80W / 4000K)

Options:

- Plug & Play Emergency kit
- Plug & Play Microwave sensor
- Suspension kit

LKTD40-4F-CCT
LKTD60-5F-CCT
LKTD80-6F-CCT

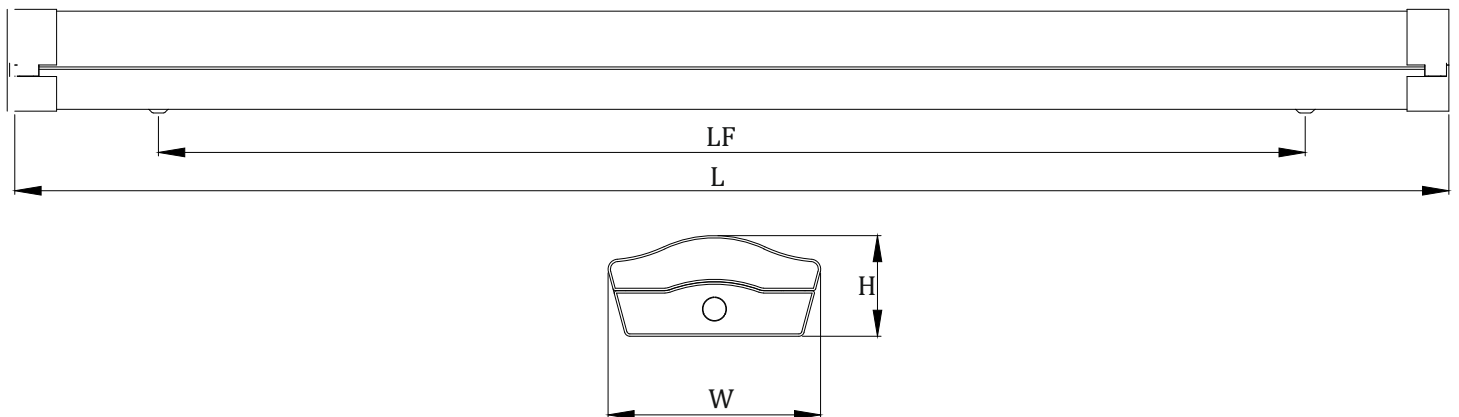

Product Code	L(mm)	W(mm)	H(mm)	L(mm)
LKTD40-4F-CCT	1205	180	85	960
LKTD60-5F-CCT	1505	180	85	1220
LKTD80-6F-CCT	1805	180	85	1520