







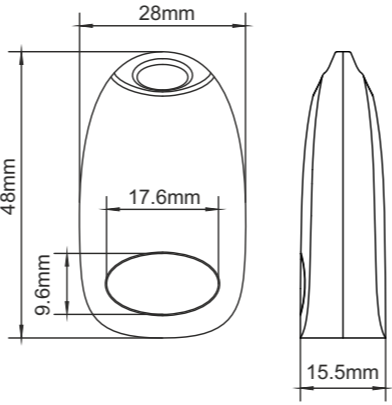




KFB1

Wireless Key Fob Switch Instructions 80*60mm

 <p>QUB1 Wireless Key Fob Switch Installation Instructions</p> <div style="display: flex; justify-content: space-around; font-size: 8px;">  Self Powered  No Radiation  No Maintenance  No Wiring  Durable  Cost Saving </div>	<p>Read instructions carefully before installation</p>  <p>Wireless Key Fob Switch</p>	<p>Specifications</p> <p>Wireless Key Fob Switch Technical Parameters:</p> <p>Work Type: Push Button Power Source: Micro energy acquisition and self generating (no battery required) Number of Keys: 1 (1 gang) Control Distance*: 80m (outdoor) / 25m (indoor) Control Method: Pairing with Kinetic Wireless Controller Life Time: 200,000 times on/off 3 Year Warranty Weight: 25g Work Environment Temperature: -30°C ~ 55°C</p> <div style="text-align: center;">  </div> <p style="font-size: 8px;">Every Kinetic product has passed the strict quality inspection before it leaves the factory. Kinetic provides 3 years warranty if installed & used in accordance with these instructions. Within the 3 years warranty period, Kinetic will be responsible for the repair, free replacement of parts or entire product.</p> <p style="font-size: 8px;">* Distance comes from Kinetic laboratory test result. The actual distance in practical use might vary due to environmental difference.</p>
---	--	---

<p>Wireless Key Fob Switch Operation:</p> <p>The Kinetic wireless key fob switch is portable and can be snapped into the key ring. It can be used with the standard or with the dimming Kinetic receiving controller (see controller instructions for more details about pairing).</p> <p>Dimming Operation:</p> <p>When paired with the dimmable Kinetic controllers (QUR301 and QURW01) the key fob switch can also dim the lights: Pressing the switch quickly will turn the light ON/OFF. Keep the switch pressed to dim the light to the desired level. While the switch is pressed the lights will go down from 100%-0% and they will go up from 0-100% cyclically.</p> <p>Kinetic Switch and Controller Wireless System:</p> <p>The wireless Kinetic key fob energy switch and wireless receiving controller can be paired with any combination: a controller can be controlled by a maximum of 10 separate switches, a switch can pair an unlimited number of controllers.</p>	<p>Product dimensions:</p> 	<p>KFB1 Wireless Key Fob Switch</p>  
---	---	--